


**DESCRIPTION**

LIFT-EZE OC 500 does not mix with water allowing it to float on the surface of wastewater contained in the lift station. It will rise and fall with the level of wastewater to keep walls, pumps, hoses, etc. clean and functioning properly. The special soybean oil derivative does not evaporate as quickly as other solvents, so it remains on the surface of the wastewater longer to penetrate and dissolve wastewater deposits.

**DIRECTIONS**

Simply pour LIFT-EZE OC 500 into the lift station. Use approximately 1/2 gallon for every square foot of wastewater surface area.

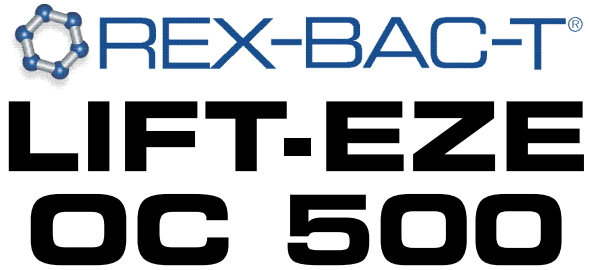

FLOATING LIFT STATION DEGREASER  
STRIP GREASE AWAY THE ALL NATURAL WAY

Sold By:



**CAUTION - COMBUSTIBLE**

May be harmful if swallowed. May irritate eyes and skin. Keep away from heat, spark or open flame. Do not take internally. Avoid contact with eyes and prolonged contact with skin.

**FIRST AID:**

If Swallowed: Give person several glasses of water. Do NOT induce vomiting. Obtain medical assistance.

If In Eyes: Flush eyes and under eyelids with plenty of cool water for at least 15 minutes. Obtain medical assistance.

**KEEP OUT OF REACH OF CHILDREN**

THIS PRODUCT CONTAINS	CAS NUMBER
Methyl Ester of Soybean Oil	.....67784-80-9
d'Limonene	..... 5989-27-5
Green Dye	..... No CAS Number

**NET CONTENTS: 55 GALLONS**